

SUZUKI
Way of Life!

NEW

APV



New Front Bumper & Grille




Bumper depan dipadu dengan grille sehingga tampil lebih gagah dengan lekukan tajam berkesan aerodinamis.

New Head Lamp



Disain baru Head lamp yang besar dengan multi-reflector menampilkan gaya futuristik mobil berkelas.

New Backdoor Garnish



Bukaan bagasi dengan chrome menambah kesan mewah.

New Rear Lamp



Tampil mewah menyatu dengan lampu sein dan lampu mundur, lebih terang tapi tidak menyilaukan.



New Dashboard

Dashboard mewah dengan instrumen panel yang mudah dibaca dan dioperasikan.


Specification

Colors



	APV				
	GL	GX-MT	GX-AT	SGX-MT	SGX-AT
DIMENSIONS					
Overall length (mm)	4225				
Overall width (mm)	1655				
Overall height (mm)	1855				
Wheelbase (mm)	2625				
Tread (mm)	1435				
Front (mm)	1435				
Rear (mm)	1435				
Minimum ground clearance (mm)	175 (Diff)	175 (Diff)	170 (AT oil pan)	175 (Diff)	170 (AT oil pan)
Minimum turning radius (m)	4.9				
WEIGHTS					
Curb weight (kg)	1.160-1.325				
Gross vehicle weight (kg)	1.950				
CAPACITIES					
Seating capacity (persons)	8	8	8	7	7
Fuel Tank Capacity (liters)	46				
ENGINES					
Type	G15A				
Number of cylinders	4				
Number of valves	16				
Piston Displacement (cc)	1,493				
Bore x stroke (mm)	75.0 x 84.5				
Compression ratio	9.5				
Maximum output (PS/rpm)	105/6,000				
Maximum torque (N.m/rpm)	126/3,000				
Fuel system	Multi Point Injection				
TRANSMISSIONS					
Type	5-speed Manual	5-speed Manual	4-speed Automatic	5-speed Manual	4-speed Automatic
Gear ratios	1st 3.652	3.652	2.826	3.652	2.826
	2nd 1.947	1.947	1.493	1.947	1.493
	3rd 1.423	1.423	1.000	1.423	1.000
	4th 1.000	1.000	0.730	1.000	0.730
	5th 0.795	0.795	-	0.795	-
Reverse	3.466	3.466	2.703	3.466	2.703
Final	5.375	5.375	5.375	5.375	5.375
STEERING					
Type	Rack & Pinion				
SUSPENSIONS					
Front	Mac Pherson Strut & Coil Springs				
Rear	3-link rigid axle with coil springs				
BRAKES					
Front	Ventilated Discs				
Rear	Leading & Trailing Drums				
TYRES & Wheel					
Tyres (Front & Rear)	185/80 R14		195/65 R15		
Wheels	Alloy 14"		Alloy 15"		
SAFETY AND SECURITY					
Seatbelts	Front 3-point ELR x 2 with height adjustable seatbelt anchors	●	●	●	●
Side Impact Beam	●	●	●	●	●
Keyless entry	-	-	-	●	●

New Engine Performance



Performa mesin yang telah disempurnakan, menjadi lebih bertenaga dan lebih irit.

New Suspension



Suspensi depan dan belakang menggunakan coil spring, lebih nyaman dan lebih stabil.

New AC Double Blower




AC double blower roof compartment tampil lebih tipis dan rapih (SGX).

New Seating Arrangement



Tempat duduk baris kedua (captain seat) dengan sistem sliding, menyajikan kebebasan bagi penumpang untuk menikmati kenyamanan sepanjang perjalanan (SGX).

Dimensi

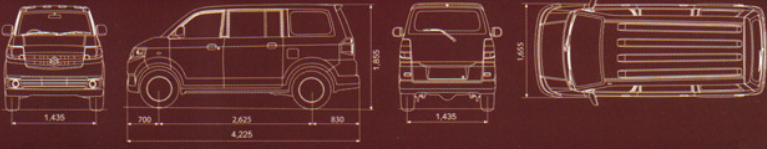

Sole Agent
PT INDOMOBIL SUZUKI INTERNATIONAL
 J. Diponegoro Km. 36.2 Tambun-Bekas

Sole Distributor
PT INDOMOBIL NIAGA INTERNATIONAL
 Wisma Indomobil 7, Floor, J. MT. Haryono Km. 8, Jakarta 13330

www.suzuki.co.id

